


Laser Diode Array Submodules

SILVER BULLET™

- Packaged 1, 2, 3 Bar Laser Diode Array
- Easily Soldered to a Heat Exchanger
- Available Wavelengths 790-1550nm

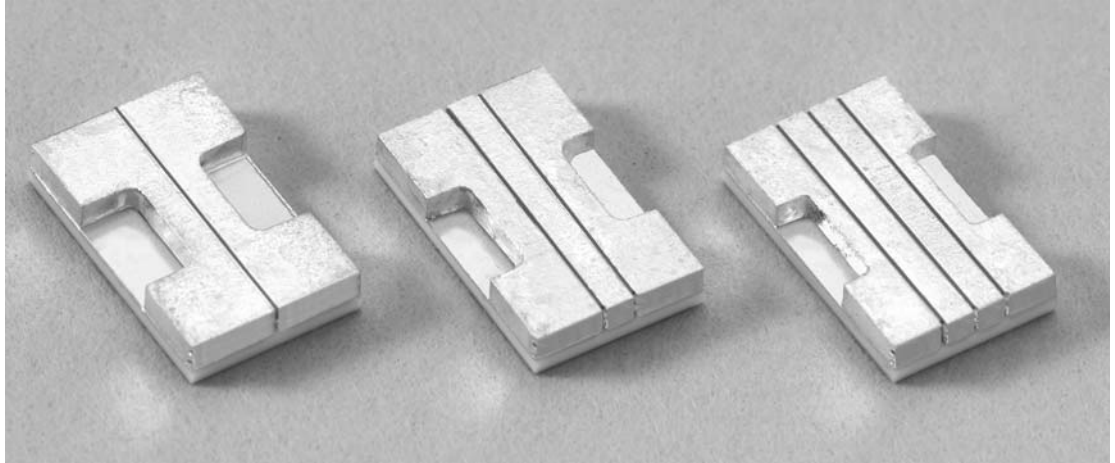


PRODUCT CHARACTERISTICS

The Silver Bullet™ is a fundamental building block for constructing high-power diode laser arrays. Each Silver Bullet™ consists of one to three mounted, CW laser diode bars on a BeO substrate. These modules can be either mounted on customer supplied heat exchangers or on a variety of heat exchangers offered by us. For customers who wish to build their own arrays using these modules, a soldering kit is available which contains a complete set of instructions. The Silver Bullet™ was designed to be a viable option for those developing new systems and to offer the flexibility to be retrofitted into existing systems.

Every Silver Bullet™ comes with a complete data packet which includes, P-I, V-I, power conversion efficiency and wavelength spectrum. This data packet offers customers the unique opportunity to have their own bars packaged, characterized, and prescreened according to customer supplied specification before being mounted on heat exchangers. Laser diode bar cavity lengths of up to 1 mm can be packaged in the current configuration, and the package is easily adapted to custom applications.

The Silver Bullet™ family consists of 20W CW and 40W CW 1-bar arrays; 40W CW and 70W CW 2-bar arrays; and 60W CW and 90W CW 3-bar arrays.

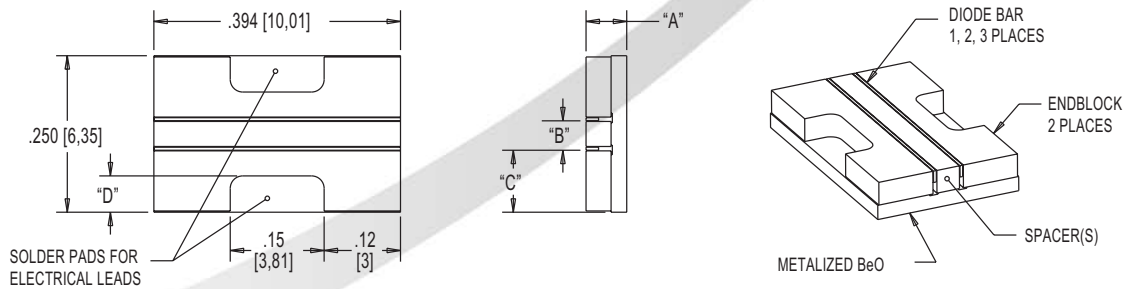

For A, B, C, D reference mechanical characteristics


NORTHROP GRUMMAN
Space Technology

Cutting Edge Optonics


20 Point West Blvd. St. Charles, MO 63301 636.916.4900 p 636.916.4994 f
www.st.northropgrumman.com/ceolaser st-ceolaser-info@ngc.com

OPTICAL CHARACTERISTICS


ASM06C020



ASM12C040



ASM14C060



PARAMETER	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
CW Power Outputs (W)	20	---	---	40	---	---	60	---	---
Operating Current (A)	---	26	30	---	28	32	---	30	34
Threshold Current (A)	---	7.5	9.0	---	7.5	9.0	---	7.5	9.0
		25°C Heat Sink			25°C Heat Sink			25°C Heat Sink	
Slope Efficiency (W/A)	0.9	1.1	---	1.7	2.2	---	2.3	3.3	---
		25°C Heat Sink			25°C Heat Sink			25°C Heat Sink	
Efficiency (%)	32	42	---	30	40	---	28	36	---
		20W at 25°C Heat Sink			40W at 25°C Heat Sink			60W at 25°C Heat Sink	
Number of Emitters per bar	---	46	---	---	46x2	---	---	46x3	---
Emitter Size (µm)	---	80x1	---	---	80x1	---	---	80x1	---
Emitter Pitch (µm)	---	200	---	---	200	---	---	200	---
Center Wavelength (nm)	---	808	---	---	808	---	---	808	---
		20W at 25°C Heat Sink			40W at 25°C Heat Sink			60W at 25°C Heat Sink	
Wavelength Tolerance (nm)		± 3			± 3			± 3	
		20W at 25°C Heat Sink			40W at 25°C Heat Sink			60W at 25°C Heat Sink	
Spectral Width (nm) FWHM	---	1.9	2.5	---	2.5	3.2	---	3.1	4.0
		20W at 25°C Heat Sink			40W at 25°C Heat Sink			60W at 25°C Heat Sink	
Wavelength Shift (nm/°C)	0.23	0.25	0.27	0.23	0.25	0.27	0.23	0.25	0.27
Beam Divergence FWHM (°x°)	---	40x10	43x12	---	40x10	43x12	---	40x10	43x12

ELECTRICAL CHARACTERISTICS

Series Resistance (ohms)	---	0.005	0.012	---	0.010	0.024	---	0.015	0.036
		25°C Heat Sink			25°C Heat Sink			25°C Heat Sink	
Operating Voltage (V)	---	1.8	2.1	---	3.6	4.2	---	5.5	6.3
		25°C Heat Sink, 40W			25°C Heat Sink, 40W			25°C Heat Sink, 60W	
Max Reverse Current (µA)		25			25			25	
Max Reverse Voltage (V)		3			3			3	

MECHANICAL CHARACTERISTICS


"A" Package Height (in) ±.003		0.083			0.081			0.081	
"B" Bar Pitch (in/mm) ±.003		---			0.047/1.19			0.047/1.19	
"C" Outside to Bar (in) ±.004		0.08			0.099			0.076	
"D" Soldering Pad Width (in) ±.01		0.123			0.06			0.05	

NOTES


(1) These specifications apply for operation at 808nm. Other wavelengths available upon request

OPTICAL CHARACTERISTICS


ASM06C040



ASM12C070



ASM14C090



PARAMETER	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
CW Power Outputs (W)	40	---	---	70	---	---	90	---	---
	60A at 25°C Heat Sink			57A at 25°C Heat Sink			54A at 25°C Heat Sink		
Operating Current (A)	---	55	60	---	52	57	---	49	54
	40W at 25°C Heat Sink			70W at 25°C Heat Sink			90W at 25°C Heat Sink		
Threshold Current (A)	---	14	20	---	14	20	---	14	20
	25°C Heat Sink			25°C Heat Sink			25°C Heat Sink		
Slope Efficiency (W/A)	0.8	1.0	---	1.6	2.0	---	1.8	2.3	---
	25°C Heat Sink			25°C Heat Sink			25°C Heat Sink		
Efficiency (%)	29	38	---	27	35	---	25	32	---
	40W at 25°C Heat Sink			70W at 25°C Heat Sink			90W at 25°C Heat Sink		
Number of Emitters	---	46	---	---	46x2	---	---	46x3	---
Emitter Size (µm)	---	80x1	---	---	80x1	---	---	80x1	---
Emitter Pitch (µm)	---	200	---	---	200	---	---	200	---
Center Wavelength (nm)	808			808			808		
	40W at 25°C Heat Sink			70W at 25°C Heat Sink			90W at 25°C Heat Sink		
Wavelength Tolerance (nm)	± 3			± 3			± 3		
	40W at 25°C Heat Sink			70W at 25°C Heat Sink			90W at 25°C Heat Sink		
Spectral Width (nm) FWHM	---	2.0	2.6	---	3.0	3.8	---	4.0	5.0
	40W at 25°C Heat Sink			70W at 25°C Heat Sink			90W at 25°C Heat Sink		
Wavelength Shift (nm/°C)	0.23	0.25	0.27	0.23	0.25	0.27	0.23	0.25	0.27
Beam Divergence FWHM (°x°)	---	40x10	43x12	---	40x10	43x12	---	40x10	43x12

ELECTRICAL CHARACTERISTICS

Series Resistance (ohms)	---	0.006	0.010	---	0.012	0.020	---	0.018	0.030
	25°C Heat Sink			25°C Heat Sink			25°C Heat Sink		
Operating Voltage (V)	---	1.9	2.3	---	3.8	4.5	---	5.7	6.7
	25°C Heat Sink, 40W			25°C Heat Sink, 70W			25°C Heat Sink, 90W		
Max Reverse Current (µA)	25			25			25		
Max Reverse Voltage (V)	3			3			3		

MECHANICAL CHARACTERISTICS


"A" Package Height (in) ±.003	0.083			0.081			0.081		
"B" Bar Pitch (in/mm) ±.003	---			0.047/1.19			0.047/1.19		
"C" Outside to Bar (in) ±.004	0.123			0.099			0.076		
"D" Soldering Pad Width (in) ±.01	0.08			0.06			0.05		

NOTES

(1) These specifications apply for operation at 808nm. Other wavelengths available upon request

MECHANICAL CHARACTERISTICS

PARAMETER	DIMENSIONS
Operating Temperature Range ⁽²⁾	-20°C to 50°C
Storage Temperature Range ⁽²⁾	-40°C to 85°C

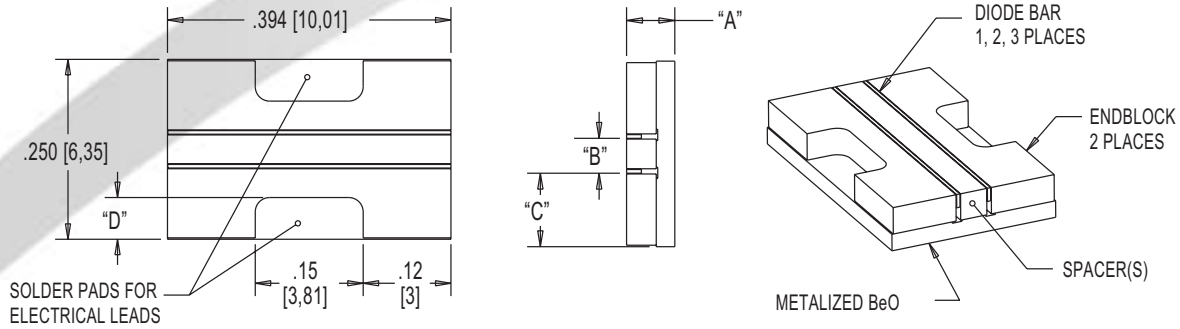


For A, B, C, D reference mechanical characteristics

PACKAGING CHARACTERISTICS

PARAMETER	DIMENSIONS
Metalization	100 μ inch Au over TiW barrier
Soldering ⁽³⁾	Detailed instructions provided
Heat Exchanger Capacity ⁽⁴⁾	2.5 times the output power
Heat Exchanger Thermal Resistance	< 0.25°C -cm ² /W

ORDERING SPECIFICATIONS

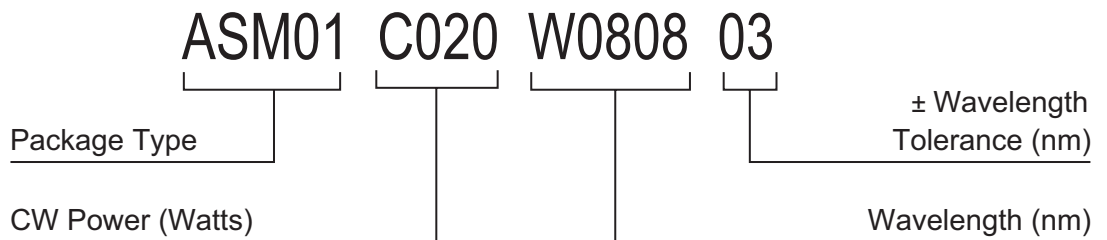

NOTES

- (2) A dry nitrogen environment should be provided by the user when storing and operating at temperatures below ambient dew point.
- (3) Maximum solder temperature is 100°C. Indalloy 8 or Ostalloy 200 (44In42Sn14Cd) are recommended solders.
- (4) Several heat exchangers and heatsinking application notes are offered.

NORTHROP GRUMMAN
Space Technology

Cutting Edge Optonics

Copyright © 2003 Northrop Grumman Cutting Edge Optonics
All Rights Reserved. Northrop Grumman Cutting Edge Optonics reserves the right to change product design and specifications at any time without notice.


No license is granted by implication or otherwise under any patents or patent rights of Northrop Grumman Cutting Edge Optonics or others.

No responsibility is assumed for the use of these products, nor for any infringement on the rights of others resulting from the use of these products.

Information contained herein is believed to be reliable and accurate.

This Product is covered by one or more of the following Patents: 5,898,211 5,985,684 5,913,108 6,310,900 Other US and Foreign Patents Pending.

Laser diode product components are intended for use in a user-devised end system. However, these products are capable of emitting Class IV radiation. Extreme care must be exercised during their operation. Only persons familiar with the appropriate safety precautions should operate a laser product. Directly viewing the laser beam or exposure to specular reflections must be avoided. Serious injury may result if any part of the body is exposed to the beam. The eye is extremely sensitive to the infrared radiation and therefore, proper eyewear must be worn at all times. Use of optical instruments with these products may increase eye hazard. Always wear proper eye protection when operating.



Rev A 02/04

20 Point West Blvd. St. Charles, MO 63301 636.916.4900 p 636.916.4994 f

www.st.northropgrumman.com/ceolaser st-ceolaser-info@ngc.com